

## **FCC Information and Copyright**

This equipment has been tested and found to comply with the limits of a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. There is no guarantee that interference will not occur in a particular installation.

The vendor makes no representations or warranties with respect to the contents here and specially disclaims any implied warranties of merchantability or fitness for any purpose. Further the vendor reserves the right to revise this publication and to make changes to the contents here without obligation to notify any party beforehand.

Duplication of this publication, in part or in whole, is not allowed without first obtaining the vendor's approval in writing.

The content of this user's manual is subject to be changed without notice and we will not be responsible for any mistakes found in this user's manual. All the brand and product names are trademarks of their respective companies.



### **Dichiarazione di conformità sintetica**

Ai sensi dell'art. 2 comma 3 del D.M. 275 del 30/10/2002

Si dichiara che questo prodotto è conforme alle normative vigenti e soddisfa i requisiti essenziali richiesti dalle direttive

2004/108/CE, 2006/95/CE e 1999/05/CE

quando ad esso applicabili

### **Short Declaration of conformity**

We declare this product is complying with the laws in force and meeting all the essential requirements as specified by the directives

2004/108/CE, 2006/95/CE and 1999/05/CE

whenever these laws may be applied

---

---

## Table of Contents

---

---

<b>Chapter 1: Introduction</b> .....	<b>1</b>
1.1 Before You Start .....	1
1.2 Package Checklist .....	1
1.3 Motherboard Specifications .....	2
1.4 Rear Panel Connectors .....	3
1.5 Motherboard Layout.....	4
<b>Chapter 2: Hardware Installation</b> .....	<b>5</b>
2.1 Install Central Processing Unit (CPU).....	5
2.2 Install a Heatsink .....	6
2.3 Connect Cooling Fans .....	7
2.4 Install System Memory .....	8
2.5 Expansion Slots.....	10
2.6 Jumper Setting .....	11
2.7 Headers & Connectors .....	12
<b>Chapter 3: UEFI BIOS &amp; Software</b> .....	<b>18</b>
3.1 UEFI BIOS Setup .....	18
3.2 BIOS Update.....	18
3.3 Software.....	22
<b>Chapter 4: Useful Help</b> .....	<b>26</b>
4.1 Driver Installation.....	26
4.2 AMI BIOS Beep Code.....	27
4.3 Troubleshooting.....	27
4.4 RAID Functions .....	29
4.5 AMD Dual Graphics Technology .....	31
<b>Appendix: Specifications in Other Languages</b> .....	<b>34</b>
Arabic.....	34
French .....	36
German .....	38
Italian .....	40
Japanese.....	42
Polish .....	44
Portuguese .....	46
Russian .....	48
Spanish.....	50

## **CHAPTER 1: INTRODUCTION**

### **1.1 Before You Start**

Thank you for choosing our product. Before you start installing the motherboard, please make sure you follow the instructions below:

- Prepare a dry and stable working environment with sufficient lighting.
- Always disconnect the computer from power outlet before operation.
- Before you take the motherboard out from anti-static bag, ground yourself properly by touching any safely grounded appliance, or use grounded wrist strap to remove the static charge.
- Avoid touching the components on motherboard or the rear side of the board unless necessary. Hold the board on the edge, do not try to bend or flex the board.
- Do not leave any unfastened small parts inside the case after installation. Loose parts will cause short circuits which may damage the equipment.
- Keep the computer from dangerous area, such as heat source, humid air and water.
- The operating temperatures of the computer should be 0 to 45 degrees Celsius.
- To avoid injury, be careful of:
  - Sharp pins on headers and connectors
  - Rough edges and sharp corners on the chassis
  - Damage to wires that could cause a short circuit

### **1.2 Package Checklist**

- Serial ATA Cable x2
- Rear I/O Panel for ATX Case x1
- User's Manual x1
- Fully Setup Driver DVD x1


<p><b>Note:</b> The package contents may be different due to the sales region or models in which it was sold. For more information about the standard package in your region, please contact your dealer or sales representative.</p>
---

## 1.3 Motherboard Specifications

Specifications																			
CPU Support	Socket FM2+/FM2 for AMD A-series processor Maximum CPU TDP (Thermal Design Power): 100Watt * Please refer to <a href="http://www.biostar.com.tw">www.biostar.com.tw</a> for CPU support list.																		
Chipset	AMD A88X FCH (Hi-Fi A88S3+) AMD A78 FCH (Hi-Fi A78S3+)																		
Memory	Supports Dual Channel DDR3 800/ 1066/ 1333/ 1600/ 1866/ 2133/ 2400(OC)/ 2600(OC) 4 x DDR3 DIMM Memory Slot, Max. Supports up to 64 GB Memory Each DIMM supports non-ECC 512MB/ 1/ 2/ 4/ 8/ 16 GB DDR3 module * Please refer to <a href="http://www.biostar.com.tw">www.biostar.com.tw</a> for Memory support list.																		
Storage	AMD A88X/A78 FCH Supports RAID 0, 1, 10, 5 & AHCI (AMD A88X FCH) Supports RAID 0, 1, 10 & AHCI (AMD A78 FCH),																		
LAN	Realtek RTL 8111G 10/ 100/ 1000 Mb/s auto negotiation, Half / Full duplex capability																		
Audio Codec	ALC892 7.1 Channels, High Definition Audio, Biostar Hi-Fi																		
USB	AMD A88X/A78 FCH: 8x USB 2.0 port (4 on rear I/Os and 4 via internal headers) 4x USB 3.0 port (2 on rear I/Os and 2 via internal headers)																		
Expansion Slots	2x PCI Slot 1x PCIe 3.0 x16 Slot (x16) (Only FM2+ processors can support PCIe 3.0.) 1x PCIe 2.0 x16 Slot (x4)																		
Rear I/Os	1x PS/2 Mouse & Keyboard 1x VGA Port 1x HDMI Port 1x DVI Port 1x LAN port 4x USB 2.0 Port 2x USB 3.0 Port 6x Audio Jack																		
Internal I/Os	<table border="0"> <tr> <td><b>Hi-Fi A88S3+:</b></td> <td><b>Hi-Fi A78S3+:</b></td> </tr> <tr> <td>8x SATA 6.0Gb/s Connector</td> <td>6x SATA 6.0Gb/s Connector</td> </tr> <tr> <td>2x USB 2.0 Header</td> <td>2x USB 2.0 Header</td> </tr> <tr> <td>1x USB 3.0 Header</td> <td>1x USB 3.0 Header</td> </tr> <tr> <td>1x 4-Pin Power Connector</td> <td>1x 4-Pin Power Connector</td> </tr> <tr> <td>1x 24-Pin Power Connector</td> <td>1x 24-Pin Power Connector</td> </tr> <tr> <td>1x CPU Fan Connector</td> <td>1x CPU Fan Connector</td> </tr> <tr> <td>2x System Fan Connector</td> <td>2x System Fan Connector</td> </tr> <tr> <td>1x Front Panel Header</td> <td>1x Front Panel Header</td> </tr> </table>	<b>Hi-Fi A88S3+:</b>	<b>Hi-Fi A78S3+:</b>	8x SATA 6.0Gb/s Connector	6x SATA 6.0Gb/s Connector	2x USB 2.0 Header	2x USB 2.0 Header	1x USB 3.0 Header	1x USB 3.0 Header	1x 4-Pin Power Connector	1x 4-Pin Power Connector	1x 24-Pin Power Connector	1x 24-Pin Power Connector	1x CPU Fan Connector	1x CPU Fan Connector	2x System Fan Connector	2x System Fan Connector	1x Front Panel Header	1x Front Panel Header
<b>Hi-Fi A88S3+:</b>	<b>Hi-Fi A78S3+:</b>																		
8x SATA 6.0Gb/s Connector	6x SATA 6.0Gb/s Connector																		
2x USB 2.0 Header	2x USB 2.0 Header																		
1x USB 3.0 Header	1x USB 3.0 Header																		
1x 4-Pin Power Connector	1x 4-Pin Power Connector																		
1x 24-Pin Power Connector	1x 24-Pin Power Connector																		
1x CPU Fan Connector	1x CPU Fan Connector																		
2x System Fan Connector	2x System Fan Connector																		
1x Front Panel Header	1x Front Panel Header																		

Specifications													
	<table border="0"> <tr> <td>1x Front Audio Header</td> <td>1x Front Audio Header</td> </tr> <tr> <td>1x Clear CMOS Header</td> <td>1x Clear CMOS Header</td> </tr> <tr> <td>1x Printer Port Header</td> <td>1x Printer Port Header</td> </tr> <tr> <td>1x Consumer IR Header</td> <td>1x Consumer IR Header</td> </tr> <tr> <td>1x Serial Port Header</td> <td>1x Serial Port Header</td> </tr> <tr> <td>1x S/PDIF out Connector</td> <td>1x S/PDIF out Connector</td> </tr> </table>	1x Front Audio Header	1x Front Audio Header	1x Clear CMOS Header	1x Clear CMOS Header	1x Printer Port Header	1x Printer Port Header	1x Consumer IR Header	1x Consumer IR Header	1x Serial Port Header	1x Serial Port Header	1x S/PDIF out Connector	1x S/PDIF out Connector
1x Front Audio Header	1x Front Audio Header												
1x Clear CMOS Header	1x Clear CMOS Header												
1x Printer Port Header	1x Printer Port Header												
1x Consumer IR Header	1x Consumer IR Header												
1x Serial Port Header	1x Serial Port Header												
1x S/PDIF out Connector	1x S/PDIF out Connector												
Form Factor	microATX Form Factor, 243.84 mm x 237.50 mm												
OS Support	Windows XP / 7 / 8 Biostar reserves the right to add or remove support for any OS with or without notice.												


### 1.4 Rear Panel Connectors

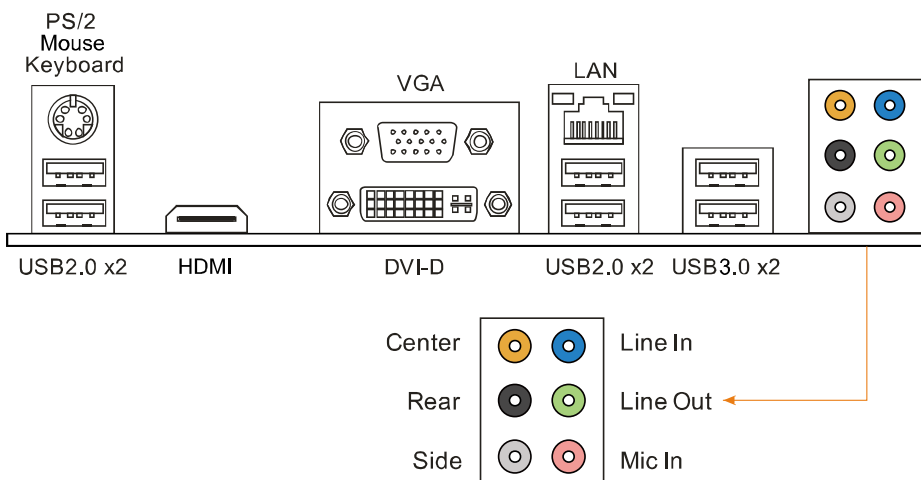

- Note 1:** HDMI / DVI-D / VGA Output require an AMD family processor with integrated graphics.
- Note 2:** The mainboard supports three onboard display outputs at same time.
- Note 3:** Since the audio chip supports High Definition Audio Specification, the function of each audio jack can be defined by software. The input / output function of each audio jack listed above represents the default setting. However, when connecting external microphone to the audio port, please use the Line In (Blue) and Mic In (Pink) audio jack.
- Note 4:** Maximum resolution:

Outputs	Maximum resolution	Bit Depth
HDMI	1920 x 1080 @60Hz	24, 30, 36 bpp
	1920 x 1200 @60Hz	24 bpp
DVI-D	1920 x 1200 @60Hz	30 bpp
	2560 x 1600 @60Hz	24 bpp
VGA	1920 x 1600 @60Hz	--

## 1.5 Motherboard Layout

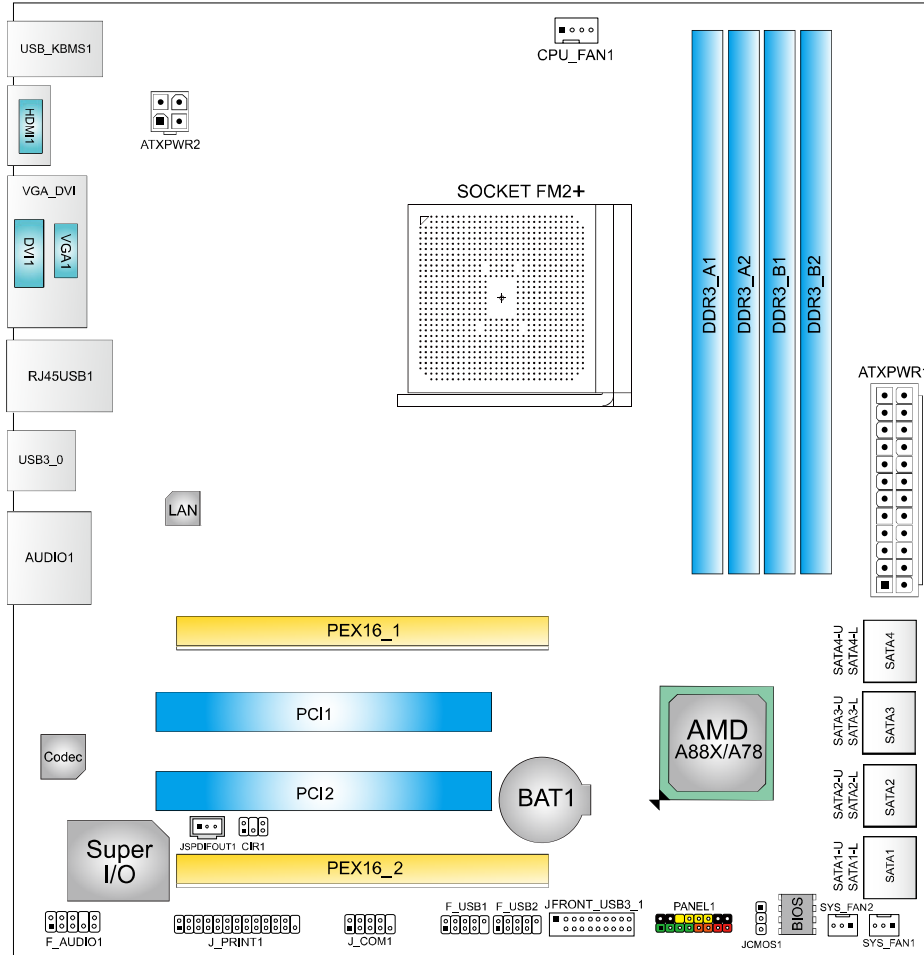


**Note1:** ■ represents the 1st pin.  
**Note2:** The SATA4 connector is only for Hi-Fi A88S3+.


## **CHAPTER 2: HARDWARE INSTALLATION**

### **2.1 Install Central Processing Unit (CPU)**


**Step 1:** Locate the CPU socket on the motherboard

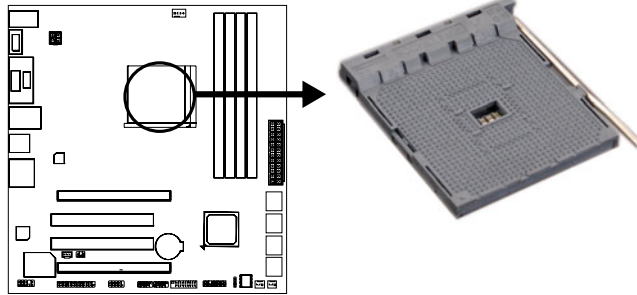

**Step 2:** Pull the socket locking out from the socket and then raise the lever up to a 90-degree angle.

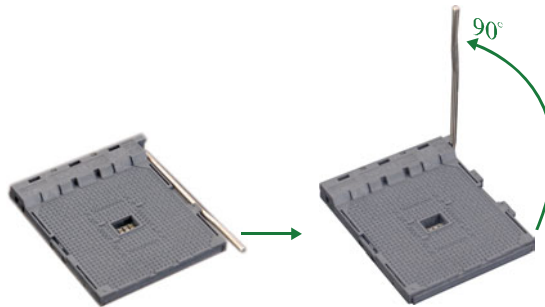


**Step 3:** Look for the white triangle on socket, and the gold triangle on CPU should point towards this white triangle. The CPU will fit only in the correct orientation.



## Motherboard Manual


---

**Step 4:** Hold the CPU down firmly, and then close the lever to locked the position

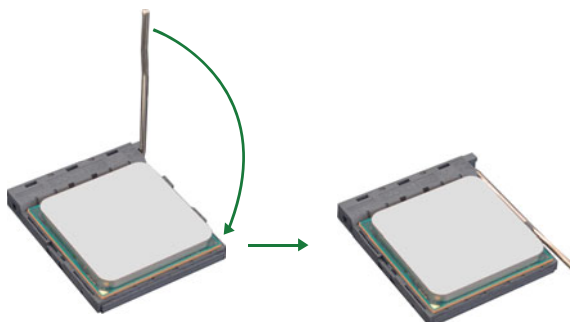

## 2.2 Install a Heatsink

**Step 1:** Place the heatsink and fan assembly onto the retention frame. Match the heatsink clip with the socket mounting-lug. Hook the spring clip to the mounting-lug.

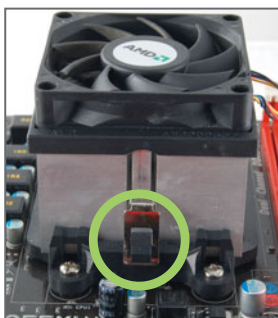

**Step 2:** On the other side, push the retention clip straight down to lock into the plastic lug on the retention frame, and then press down the locker until it stops.




**Note1:** Do not forget to connect the CPU fan connector.  
**Note2:** For proper installation, please kindly refer to the installation manual of your CPU heatsink.



## 2.3 Connect Cooling Fans


These fan headers support cooling-fans built in the computer. The fan cable and connector may be different according to the fan manufacturer. Connect the fan cable to the connector while matching the black wire to pin#1.

### CPU\_FAN1: CPU Fan Header



Pin	Assignment
1	Ground
2	+12V
3	FAN RPM rate sense
4	Smart Fan Control (By Fan)

### SYS\_FAN1/2: System Fan Header




Pin	Assignment
1	Ground
2	+12V
3	FAN RPM rate sense


**Note:** CPU\_FAN1, SYS\_FAN1/2 support 4-pin and 3-pin head connectors. When connecting with wires onto connectors, please note that the red wire is the positive and should be connected to pin#2, and the black wire is Ground and should be connected to GND.

## 2.4 Install System Memory


### A. DDR3 Modules

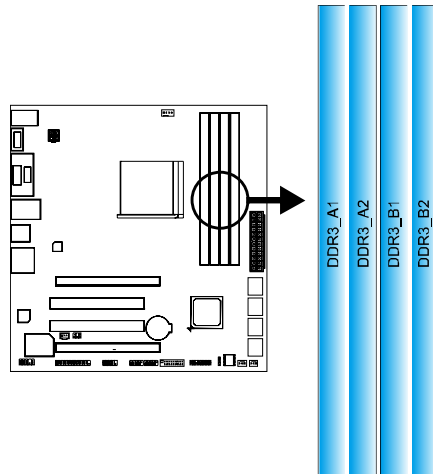

**Step 1:** Unlock a DIMM slot by pressing the retaining clips outward. Align a DIMM on the slot such that the notch on the DIMM matches the break on the slot.

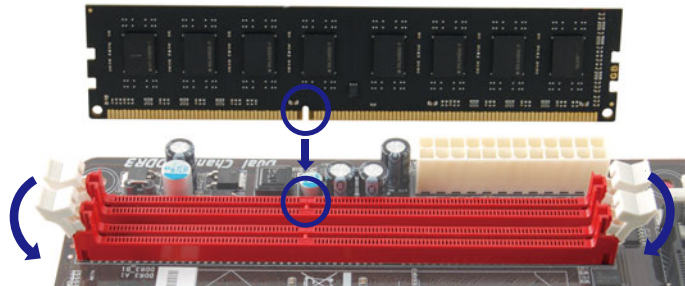

**Step 2:** Insert the DIMM vertically and firmly into the slot until the retaining clips snap back in place and the DIMM is properly seated.

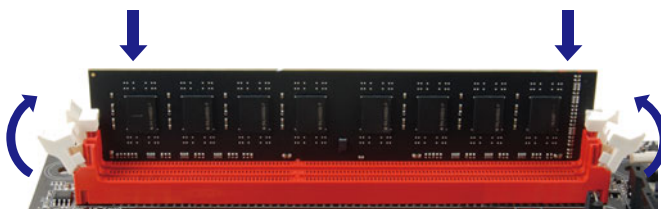

**Note:** If the DIMM does not go in smoothly, do not force it. Pull it all the way out and try again.

## B. Memory Capacity

DIMM Socket Location	DDR3 Module	Total Memory Size
DDR3_A1	512MB/1GB/2GB/4GB/8GB/16GB	Max is 64GB.
DDR3_A2	512MB/1GB/2GB/4GB/8GB/16GB	
DDR3_B1	512MB/1GB/2GB/4GB/8GB/16GB	
DDR3_B2	512MB/1GB/2GB/4GB/8GB/16GB	

## C. Dual Channel Memory Installation


Please refer to the following requirements to activate Dual Channel function:  
Install memory module of the same density in pairs, shown in the table.

Dual Channel Status	DDR3_A1	DDR3_A2	DDR3_B1	DDR3_B2
Enabled	O	X	O	X
Enabled	X	O	X	O
Enabled	O	O	O	O

(O means memory installed, X means memory not installed.)

<b>Note:</b> The DRAM bus width of the memory module must be the same (x8 or x16)
---

## 2.5 Expansion Slots

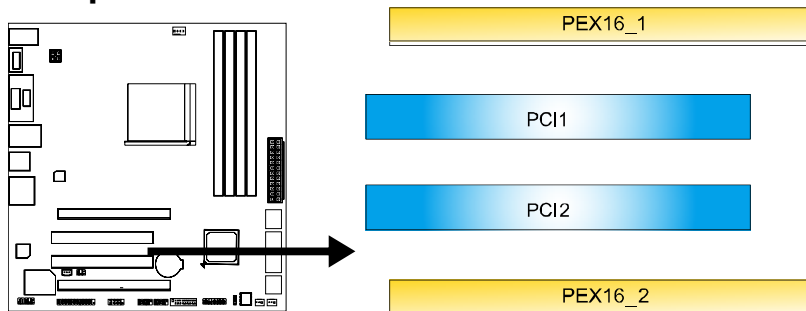

### PEX16\_1: PCI-Express Gen3 x16 Slot

- PCI-Express 3.0 compliant.
- Maximum theoretical realized bandwidth of 16GB/s simultaneously per direction, for an aggregate of 32GB/s totally.
- Only FM2+ processors can support PCIe 3.0.

### PEX16\_2: PCI-Express Gen2 x4 Slot

- PCI-Express 2.0 compliant.
- Maximum theoretical realized bandwidth of 2GB/s simultaneously per direction, for an aggregate of 4GB/s totally.

### PCI1/2: Peripheral Component Interconnect Slot

This motherboard is equipped with 1 standard PCI slot. PCI stands for Peripheral Component Interconnect, and it is a bus standard for expansion cards.

### Install an Expansion Card

You can install your expansion card by following steps:

1. Read the related expansion card's instruction document before install the expansion card into the computer.
2. Remove your computer's chassis cover, screws and slot bracket from the computer.
3. Place a card in the expansion slot and press down on the card until it is completely seated in the slot.
4. Secure the card's metal bracket to the chassis back panel with a screw.
5. Replace your computer's chassis cover.
6. Power on the computer, if necessary, change BIOS settings for the expansion card.
7. Install related driver for the expansion card.

## 2.6 Jumper Setting

The illustration shows how to set up jumpers. When the jumper cap is placed on pins, the jumper is “close”, if not, that means the jumper is “open”.



Pin opened






Pin closed



Pin1-2 closed

### JCMOS1: Clear CMOS Header

Placing the jumper on pin2-3, it allows user to restore the BIOS safe setting and the CMOS data. Please carefully follow the procedures to avoid damaging the motherboard.

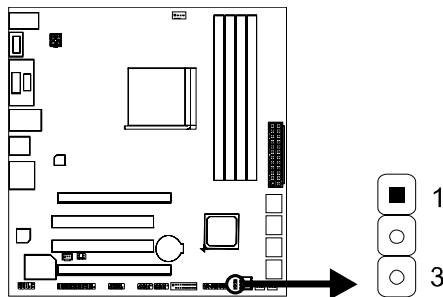


#### ※ Clear CMOS Procedures:

1. Remove AC power line.
2. Set the jumper to “Pin 2-3 close”.
3. Wait for five seconds.
4. Set the jumper to “Pin 1-2 close”.
5. Power on the AC.
6. Load Optimal Defaults and save settings in CMOS.

## 2.7 Headers & Connectors

### ATXPWR1: ATX Power Source Connector


For better compatibility, we recommend to use a standard ATX 24-pin power supply for this connector. Make sure to find the correct orientation before plugging the connector.

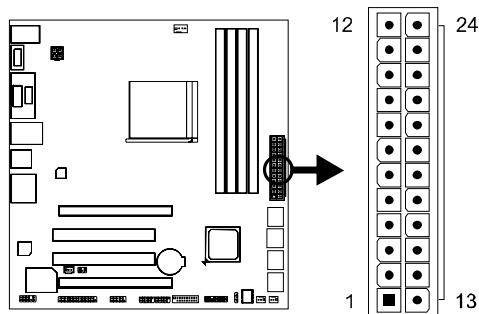

Pin	Assignment	Pin	Assignment
13	+3.3V	1	+3.3V
14	-12V	2	+3.3V
15	Ground	3	Ground
16	PS_ON	4	+5V
17	Ground	5	Ground
18	Ground	6	+5V
19	Ground	7	Ground
20	NC	8	PW_OK
21	+5V	9	Standby Voltage+5V
22	+5V	10	+12V
23	+5V	11	+12V
24	Ground	12	+3.3V

### ATXPWR2: ATX Power Source Connector

This connector will provide +12V to CPU power circuit.

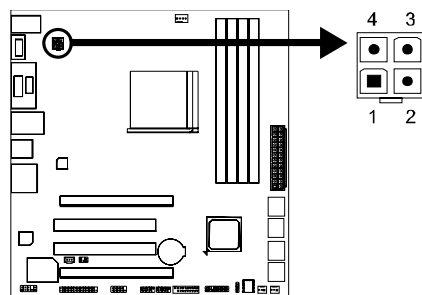


Pin	Assignment
1	+12V
2	+12V
3	Ground
4	Ground

**Note1:** Before you power on the system, please make sure that both ATXPWR1 and ATXPWR2 connectors have been plugged-in.

**Note2:** Insufficient power supplied to the system may result in instability or the peripherals not functioning properly. Use of a PSU with a higher power output is recommended when configuring a system with more power-consuming devices.

### PANEL1: Front Panel Header

This 16-pin connector includes Power-on, Reset, HDD LED, Power LED, and speaker connection. It allows user to connect the PC case's front panel switch functions.

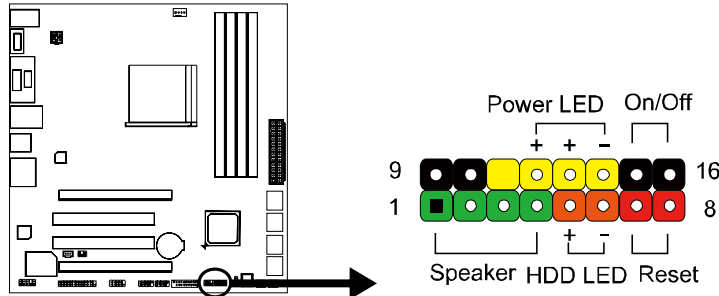


Pin	Assignment	Function	Pin	Assignment	Function
1	+5V	Speaker Connector	9	N/A	N/A
2	N/A		10	N/A	
3	N/A		11	N/A	
4	Speaker		Hard drive LED	12	Power LED (+)
5	HDD LED (+)	13		Power LED (+)	
6	HDD LED (-)	14		Power LED (-)	
7	Ground	Reset button	15	Power button	Power-on button
8	Reset control		16	Ground	

### SATA1~SATA4: Serial ATA Connectors

These connectors connect to SATA hard disk drives via SATA cables.


- Hi-Fi A88S3+ & Hi-Fi A78S3+ satisfy the SATA 3.0 spec and with transfer rate of 6.0Gb/s.
- The SATA4 (SATA4-U/SATA4-L) connector is only for Hi-Fi A88S3+.

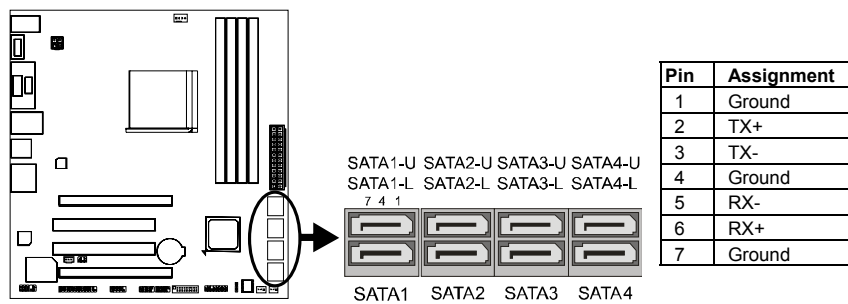

Pin	Assignment
1	Ground
2	TX+
3	TX-
4	Ground
5	RX-
6	RX+
7	Ground

### JFRONT\_USB3\_1: Header for USB 3.0 Ports at Front Panel


This header allows user to connect additional USB cable on the PC front panel, and also can be connected with a wide range of simultaneously accessible external Plug and Play peripherals.

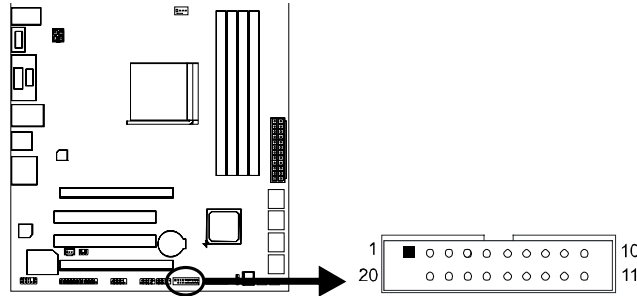

Pin	Assignment	Pin	Assignment
1	VBUS0	11	D2+
2	SSRX1-	12	D2-
3	SSRX1+	13	Ground
4	Ground	14	SSTX2+
5	SSTX1-	15	SSTX2-
6	SSTX1+	16	Ground
7	Ground	17	SSRX2+
8	D1-	18	SSRX2-
9	D1+	19	VBUS1
10	ID	20	Key

### F\_USB1/F\_USB2: Headers for USB 2.0 Ports at Front Panel

This header allows user to connect additional USB cable on the PC front panel, and also can be connected with a wide range of simultaneously accessible external Plug and Play peripherals.

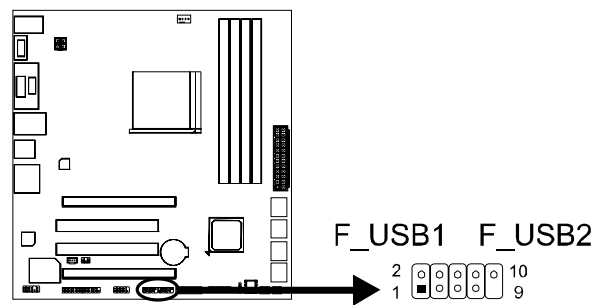


Pin	Assignment
1	+5V (fused)
2	+5V (fused)
3	USB-
4	USB-
5	USB+
6	USB+
7	Ground
8	Ground
9	NC
10	Key



### F\_AUDIO1: Front Panel Audio Header

This header allows user to connect the front audio output cable with the PC front panel. This header supports HD and AC'97 audio front panel connector.

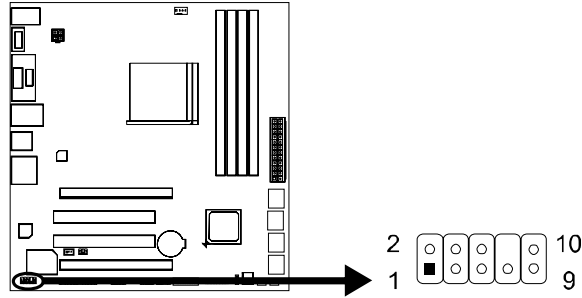


HD Audio		AC'97	
Pin	Assignment	Pin	Assignment
1	Mic Left in	1	Mic In
2	Ground	2	Ground
3	Mic Right in	3	Mic Power
4	GPIO	4	Audio Power
5	Right line in	5	RT Line Out
6	Jack Sense	6	RT Line Out
7	Front Sense	7	Reserved
8	Key	8	Key
9	Left line in	9	LFT Line Out
10	Jack Sense	10	LFT Line Out

**Note1:** It is recommended that you connect a high-definition front panel audio module to this connector to avail of the motherboard's high definition audio capability.

**Note2:** Please try to disable the "Front Panel Jack Detection" if you want to use an AC'97 front audio output cable. The function can be found via O.S. Audio Utility.


### J\_COM1: Serial Port Connector

The motherboard has a Serial Port Connector for connecting RS-232 Port.

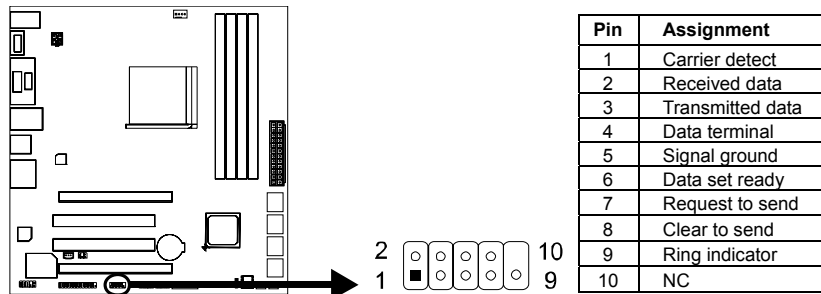

### J\_PRINT1: Printer Port Connector


This header allows you to connector printer on the PC.

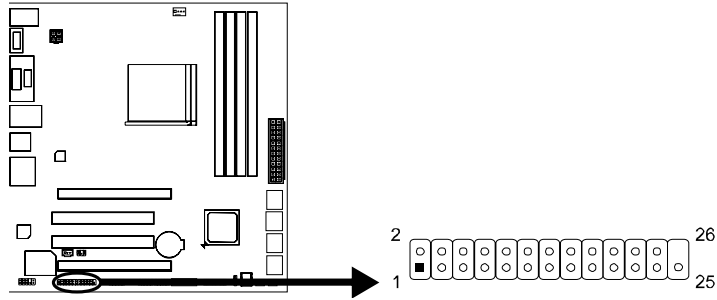

Pin	Assignment	Pin	Assignment
1	-Strobe	14	Ground
2	-ALF	15	Data 6
3	Data 0	16	Ground
4	-Error	17	Data 7
5	Data 1	18	Ground
6	-Init	19	-ACK
7	Data 2	20	Ground
8	-Scltin	21	Busy
9	Data 3	22	Ground
10	Ground	23	PE
11	Data 4	24	Ground
12	Ground	25	SCLT
13	Data 5	26	Key

### CIR1: Consumer IR Header


This header is for infrared remote control and communication.

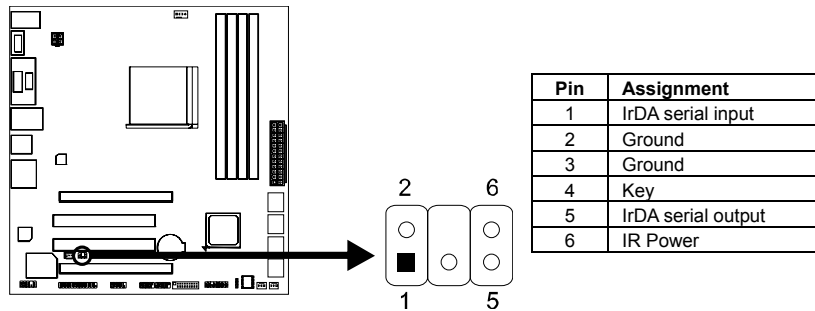

Pin	Assignment
1	IrDA serial input
2	Ground
3	Ground
4	Key
5	IrDA serial output
6	IR Power

### JSPDIFOUT1: Digital Audio-out Connector

The connector is for connecting the PCI bracket SPDIF output.

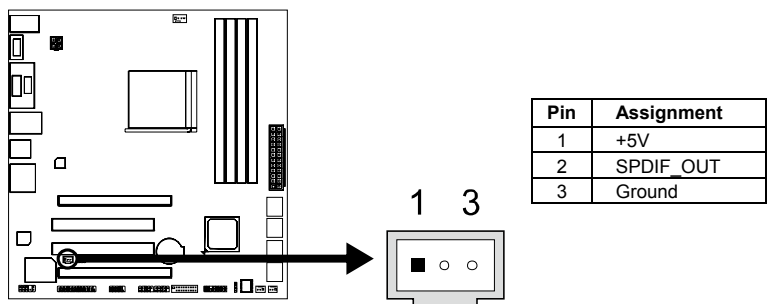

## CHAPTER 3: UEFI BIOS & SOFTWARE

### 3.1 UEFI BIOS Setup

- For better system performance, the UEFI BIOS firmware is being continuously updated. The UEFI BIOS information described below in this manual is for your reference only and the actual UEFI BIOS information and settings on board may be different from this manual
- For further information of setting up the UEFI BIOS, please refer to the UEFI BIOS Manual in the Setup DVD.

### 3.2 BIOS Update

There are three ways to update the BIOS:  
BIOS Update Utility, BIOS Online Update Utility and BIOS Flasher.


#### 1. BIOS Update Utility

1. Installing BIOS Update Utility from the DVD Driver.
2. Download the proper BIOS from [www.biostar.com.tw](http://www.biostar.com.tw).


3. Open BIOS Update Utility and click the **Update BIOS** button on the main screen.




4. A warning message will show up to request your agreement to start the BIOS update. Click **OK** to start the update procedure.

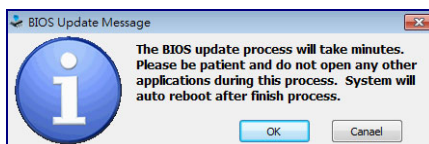

5. Choose the location for your BIOS file in the system. Please select the proper BIOS file, and then click on **Open**. It will take several minutes, please be patient.

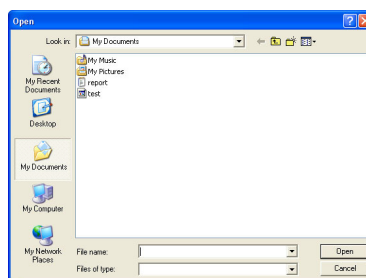

6. After the BIOS Update process is finished, click on **OK** to reboot the system.

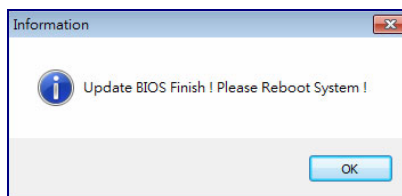


7. While the system boots up and the full screen logo shows up, please press the **Del** <Delete> key to enter BIOS setup.

After entering the BIOS setup, please go to the **Save & Exit**, using the **Restore Defaults** function to load Optimized Defaults, and select **Save Changes and Reset** to restart the computer. Then, the BIOS Update is completed.

### Backup BIOS

Click the Backup BIOS button on the main screen for the backup of BIOS, and select a proper location for your backup BIOS file in the system, and click **Save**.

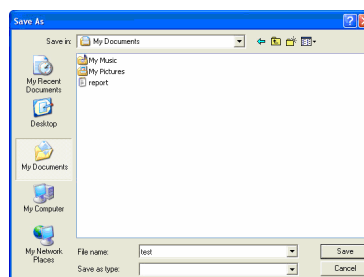


## 2. Online Update Utility

1. Installing BIOS Update Utility from the DVD Driver.
2. Please make sure the system is connected to the internet before using this function.


3. Open BIOS Update Utility and click the **Online Update** button on the main screen.




4. An open dialog will show up to request your agreement to start the BIOS update. Click **Yes** to start the online update procedure.

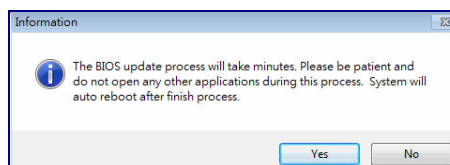


5. If there is a new BIOS version, the utility will ask you to download it. Click **Yes** to proceed.

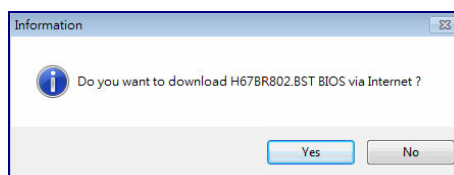


6. After the download is completed, you will be asked to program (update) the BIOS or not. Click **Yes** to proceed.

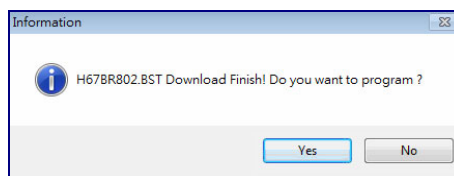

7. After the updating process is finished, you will be asked you to reboot the system. Click **OK** to reboot.

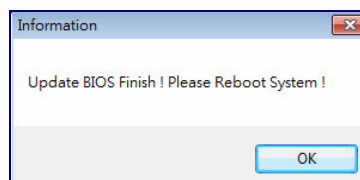

8. While the system boots up and the full screen logo shows up, press  <Delete> key to enter BIOS setup.

After entering the BIOS setup, please go to the **Save & Exit**, using the **Restore Defaults** function to load Optimized Defaults, and select **Save Changes and Reset** to restart the computer. Then, the BIOS Update is completed.

### 3. BIOSTAR BIOS Flasher

BIOSTAR BIOS Flasher is a BIOS flashing utility providing you an easy and simple way to update your BIOS via USB pen drive.

**Note1:** This utility only allows storage device with FAT32/16 format and single partition.


**Note2:** Shutting down or resetting the system while updating the BIOS will lead to system boot failure.

The BIOSTAR BIOS Flasher is built in the BIOS ROM. To enter the utility, **press <F12> during the Power-On Self Tests (POST) procedure** while booting up.

#### Updating BIOS with BIOSTAR BIOS Flasher

1. Go to the website to download the latest BIOS file for the motherboard.
2. Then, copy and save the BIOS file into a USB flash (pen) drive.
3. Insert the USB pen drive that contains the BIOS file to the USB port.
4. Power on or reset the computer and then press **<F12>** during the **POST** process.


5. After entering the POST screen, the BIOS-FLASHER utility pops out. Choose [fs0] to search for the BIOS file.

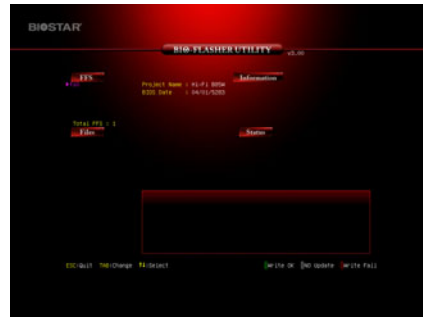


6. Select the proper BIOS file, and a message asking if you are sure to flash the BIOS file. Click Yes to start updating BIOS.



7. A dialog pops out after BIOS flash is completed, asking you to restart the system. Press the [Y] key to restart system.

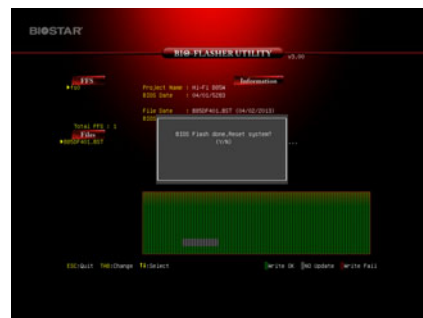

8. While the system boots up and the full screen logo shows up, press  <Delete> key to enter BIOS setup.

After entering the BIOS setup, please go to the **Save & Exit**, using the **Restore Defaults** function to load Optimized Defaults, and select **Save Changes and Reset** to restart the computer. Then, the BIOS Update is completed.

### 3.3 Software

#### Installing Software

1. Insert the Setup DVD to the optical drive. The driver installation program would appear if the Autorun function has been enabled.
2. Select **Software Installation**, and then click on the respective software title.
3. Follow the on-screen instructions to complete the installation.

**Note1:** All the information and content about following software are subject to be changed without notice. For better performance, the software is being continuously updated.

**Note2:** The information and pictures described below are for your reference only. The actual information and settings on board may be slightly different from this manual.


#### Launching Software

After the installation process is completed, you will see the software icon showing on the desktop. Double-click the icon to launch it.

#### eHot-Line

eHot-Line is a convenient utility that helps you to contact with our Tech-Support system. This utility will collect the system information which is useful for analyzing the problem you may have encountered, and then send these information to our tech-support department to help you fix the problem.


**Note:** Before you use this utility, please set Outlook Express as your default e-mail client application program.

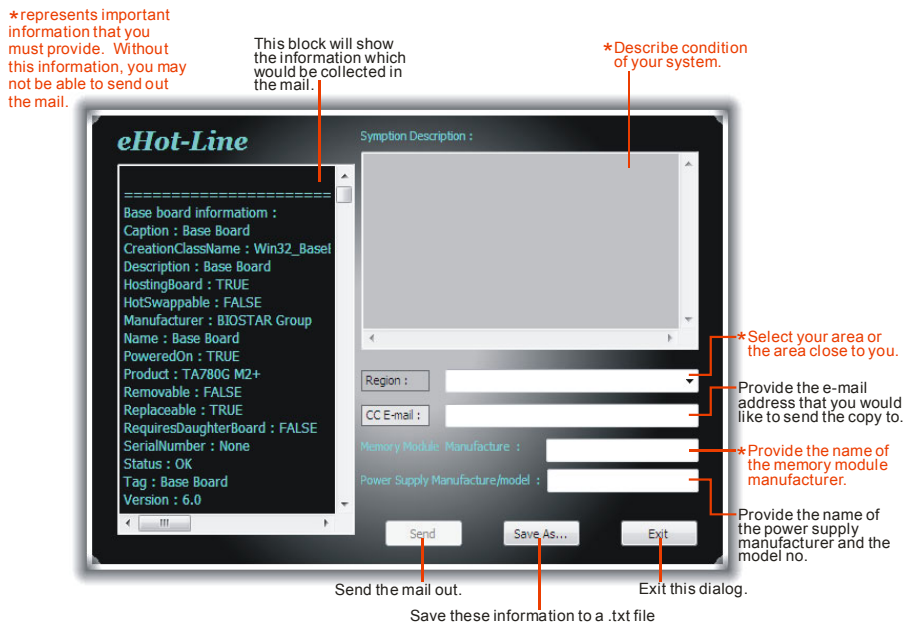




## Hi-Fi A88S3+ /Hi-Fi A78S3+

After filling up this information, click **“Send”** to send the mail out. A warning dialog would appear asking for your confirmation; click **“Send”** to confirm or **“Do Not Send”** to cancel.

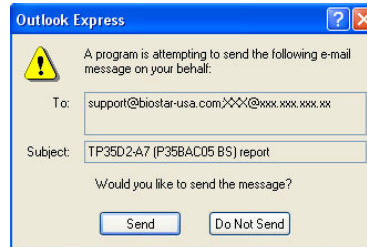


If you want to save this information to a .txt file, click **“Save As...”** and then you will see a saving dialog appears asking you to enter file name.

Enter the file name and then click **“Save”**. Your system information will be saved to a .txt file.

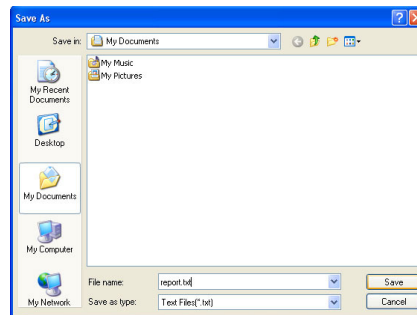


Open the saved .txt file, you will see your system information including motherboard/BIOS/CPU/video/device/OS information. This information is also concluded in the sent mail.

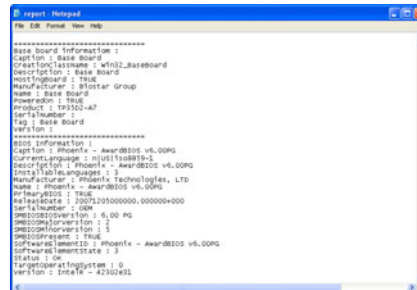

**Note1:** We will not share customer's data with any other third parties, so please feel free to provide your system information while using eHot-Line service.  
**Note2:** If you are not using Outlook Express as your default e-mail client application, you may need to save the system information to a .txt file and send the file to our tech support with other e-mail application. Go to the following web <http://www.biostar.com.tw/app/en/about/contact.php> for getting our contact information.

### **BIOScreen Utility**

This utility allows you to personalize your boot logo easily. You can choose BMP as your boot logo so as to customize your computer.

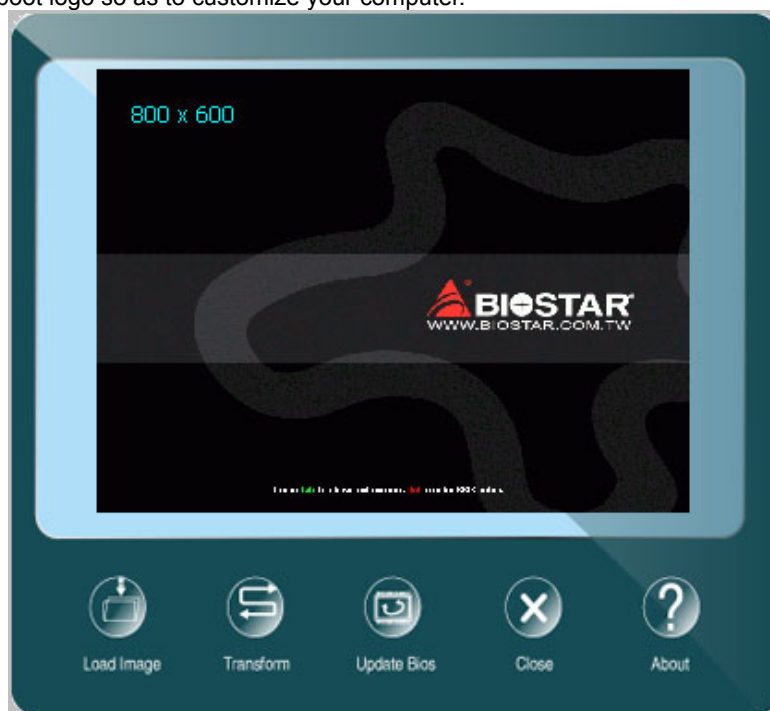


Please follow the following instructions to update boot logo:

- Load Image : Choose the picture as the boot logo.
- Transform : Transform the picture for BIOS and preview the result.
- Update Bios : Write the picture to BIOS Memory to complete the update.

## **Smart EAR**

Smart EAR is a windows-based audio utility which allows you to easily adjust system volume. With its user-friendly GUI, you can also adjust impedance setting (Low/High Gain) to optimize your headphone performance.

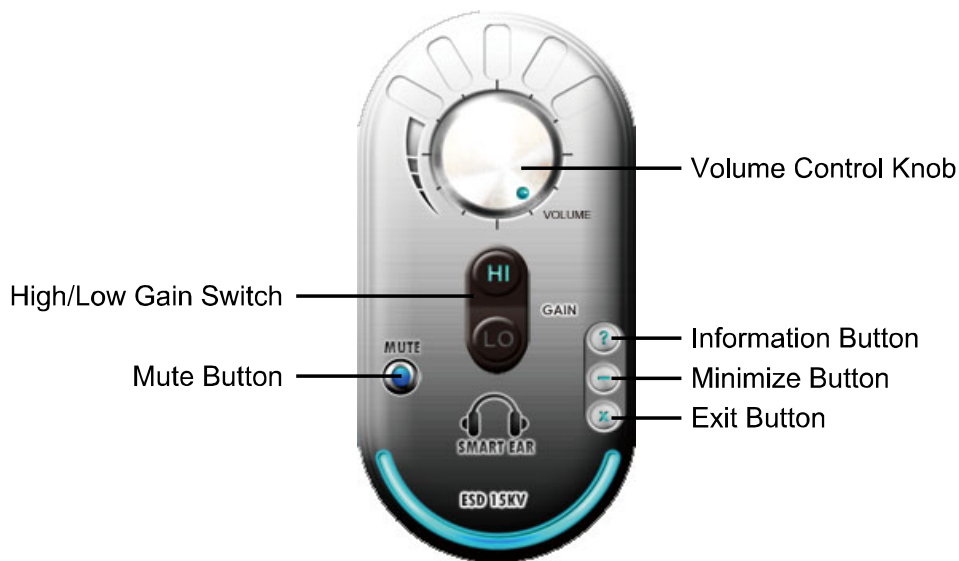

- **High/Low Gain Switch:** Keep the gain switch to low for low impedance headphone and set to high for high impedance headphone.
- **Mute Button:** To disable system sound
- **Volume Control Knob:** The volume can be finely adjusted by turning the knob either clockwise or anti-clockwise to increase or decrease system volume accordingly.
- **Information Button:** Get information of the application
- **Minimize Button:** Minimize the application window to the taskbar
- **Exit Button:** Exit the application

**Note:**

1. Smart EAR is only supported by Windows 7/8 and BIOSTAR Hi-Fi series motherboards.
2. High/Low Gain Switch is only for "Front Panel Audio Header", please make sure you are connecting your headphone to the front panel I/O.

## CHAPTER 4: USEFUL HELP

### 4.1 Driver Installation

After you installed your operating system, please insert the Fully Setup Driver DVD into your optical drive and install the driver for better system performance.

You will see the following window after you insert the DVD



The setup guide will auto detect your motherboard and operating system.

**Note:** If this window didn't show up after you insert the Driver DVD, please use file browser to locate and execute the file SETUP.EXE under your optical drive.

#### A. Driver Installation

To install the driver, please click on the Driver icon. The setup guide will list the compatible driver for your motherboard and operating system. Click on each device driver to launch the installation program.

#### B. Software Installation

To install the software, please click on the Software icon. The setup guide will list the software available for your system, click on each software title to launch the installation program.

#### C. Manual

Aside from the paperback manual, we also provide manual in the Driver DVD. Click on the Manual icon to browse for available manual.

**Note:** You will need Acrobat Reader to open the manual file. Please download the latest version of Acrobat Reader software from <http://get.adobe.com/reader/>

## 4.2 AMI BIOS Beep Code

### Boot Block Beep Codes

Number of Beeps	Description
Continuing	Memory sizing error or Memory module not found

### POST BIOS Beep Codes

Number of Beeps	Description
1	Success booting.
8	Display memory error (system video adapter)

## 4.3 Troubleshooting

Probable	Solution
<ol style="list-style-type: none"> <li>There is no power in the system. Power LED does not shine; the fan of the power supply does not work</li> <li>Indicator light on keyboard does not shine.</li> </ol>	<ol style="list-style-type: none"> <li>Make sure power cable is securely plugged in.</li> <li>Replace cable.</li> <li>Contact technical support.</li> </ol>
System is inoperative. Keyboard lights are on, power indicator lights are lit, and hard drives are running.	Using even pressure on both ends of the DIMM, press down firmly until the module snaps into place.
System does not boot from a hard disk drive, but can be booted from optical drive.	<ol style="list-style-type: none"> <li>Check cable running from disk to disk controller board. Make sure both ends are securely plugged in; check the drive type in the standard CMOS setup.</li> <li>Backing up the hard drive is extremely important. All hard disks are capable of breaking down at any time.</li> </ol>
System only boots from an optical drive. Hard disks can be read, applications can be used, but system fails to boot from a hard disk.	<ol style="list-style-type: none"> <li>Back up data and applications files.</li> <li>Reformat the hard drive. Re-install applications and data using backup disks.</li> </ol>
Screen message shows "Invalid Configuration" or "CMOS Failure."	Review system's equipment. Make sure correct information is in setup.
System cannot boot after user installs a second hard drive.	<ol style="list-style-type: none"> <li>Set master/slave jumpers correctly.</li> <li>Run SETUP program and select correct drive types. Call the drive manufacturers for compatibility with other drives.</li> </ol>

### **CPU Overheated**

If the system shutdown automatically after power on system for seconds, that means the CPU protection function has been activated.

When the CPU is over heated, the motherboard will shutdown automatically to avoid a damage of the CPU, and the system may not power on again.

In this case, please double check:

1. The CPU cooler surface is placed evenly with the CPU surface.
2. CPU fan is rotated normally.
3. CPU fan speed is fulfilling with the CPU speed.

After confirmed, please follow steps below to relief the CPU protection function.

1. Remove the power cord from power supply for seconds.
2. Wait for seconds.
3. Plug in the power cord and boot up the system.


Or you can:

1. Clear the CMOS data.  
(See "Close CMOS Header: JCMOS1" section)
2. Wait for seconds.
3. Power on the system again.

## 4.4 RAID Functions

### RAID Definitions

#### RAID 0:




In a RAID 0 system data are split up in blocks that get written across all the drives in the array. By using multiple disks (at least 2) at the same time, this offers superior I/O performance. This performance can be enhanced further by using multiple controllers, ideally one controller per disk.

#### Features and Benefits

- **Drives:** Minimum 2, and maximum is up to 6 or 8. Depending on the platform.
- **Uses:** Intended for non-critical data requiring high data throughput, or any environment that does not require fault tolerance.
- **Benefits:** provides increased data throughput, especially for large files. No capacity loss penalty for parity.
- **Drawbacks:** Does not deliver any fault tolerance. If any drive in the array fails, all data is lost.
- **Fault Tolerance:** No.
- **Total Capacity:** (Minimal. HDD Capacity) x (Connected HDDs Amount)

#### RAID 1:




Data are stored twice by writing them to both the data disk(or set of data disks) and a mirror disk (or set of disks). If a disk fails, the controller uses either the data drive or the mirror drive for data recovery and continues operation. You need at least 2 disks for a RAID 1 array.

#### Features and Benefits

- **Drives:** Minimum 2, and maximum is 2.
- **Uses:** RAID 1 is ideal for small databases or any other application that requires fault tolerance and minimal capacity.
- **Benefits:** Provides 100% data redundancy. Should one drive fail, the controller switches to the other drive.
- **Drawbacks:** Requires 2 drives for the storage space of one drive. Performance is impaired during drive rebuilds.
- **Fault Tolerance:** Yes.

**RAID 10:**

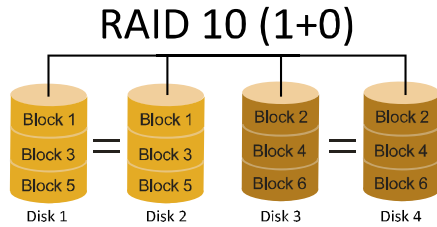


RAID 10 combines the advantages (and disadvantages) of RAID 0 and RAID 1 in one single system. It provides security by mirroring all data on a secondary set of disks (disk 3 and 4 in the drawing below) while using striping across each set of disks to speed up data transfers.

**Features and Benefits**

- **Drives:** Minimum 4, and maximum is 6 or 8, depending on the platform.
- **Benefits:** Optimizes for both fault tolerance and performance, allowing for automatic redundancy. May be simultaneously used with other RAID levels in an array, and allows for spare disks.
- **Drawbacks:** Requires twice the available disk space for data redundancy, the same as RAID level 1.
- **Fault Tolerance:** Yes.

**RAID 5:**

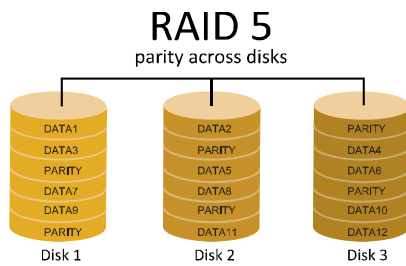

A RAID 5 array can withstand a single disk failure without losing data or access to data. Although RAID 5 can be achieved in software, a hardware controller is recommended. Often extra cache memory is used on these controllers to improve the write performance.

**Features and Benefits**

- **Drives:** Minimum 3.
- **Uses:** RAID 5 is recommended for transaction processing and general purpose service.
- **Benefits:** An ideal combination of good performance, good fault tolerance, and high capacity and storage efficiency.
- **Drawbacks:** Individual block data transfer rate same as a single disk. Write performance can be CPU intensive.
- **Fault Tolerance:** Yes.

**Note:** The RAID 5 function is only supported by A88X chipset.



## 4.5 AMD Dual Graphics Technology

### AMD Dual Graphics Technology Introduction

When user adds a PCIE display adapter, it can be integrated with IGD to show better performance. To make the two video devices work simultaneously and normally, please refer to the following setting.

### MD Dual Graphics Requirement

- Operating System: Windows 7 / Windows 8
- Supported Dual Graphics Combinations:

<b>Richland APUs</b>			
AMD Radeon™ Graphics Card	A10-Series HD 8670D	A8-Series HD8570D	A6-Series HD 8470D
“Oland” XT, HD 8870	●	●	●(Note2)
“Oland” Pro, HD 8850	●	●	●
“Turks” XT, HD 6670	●	●	●
“Turks” Pro, HD 6570	●	●	●
“Caicos” Pro, HD 6450	●	●	●
<b>Trinity APUs</b>			
AMD Radeon™ Graphics Card	A10-Series HD 7660D	A8-Series HD7560D	A6-Series HD 7540D
“Turks” XT, HD 6670	●	●	--
“Turks” Pro, HD 6570	●	●	●
“Caicos” Pro, HD 6450	--	--	●

● Recommended graphics cards for AMD dual-graphics

**Note 1:** A4-Series CPUs do not support Dual Graphics.


**Note 2:** Only available for DDR3 graphics memory

**Note 3:** The information described above in this manual is for your reference only and the actual information and settings on board may be different from this manual. For further AMD Dual Graphics information, please visit the following website: <http://www.amd.com>


## AMD Dual Graphics Setup

**Step 1:** Insert Dual Graphics-Ready graphics card into PEX16\_1 slot.

**Step 2:** Set the BIOS setting as follows:  
[Chipset]→[North Bridge]→[GFX Configuration]  
→[Surround View]→[Enabled]

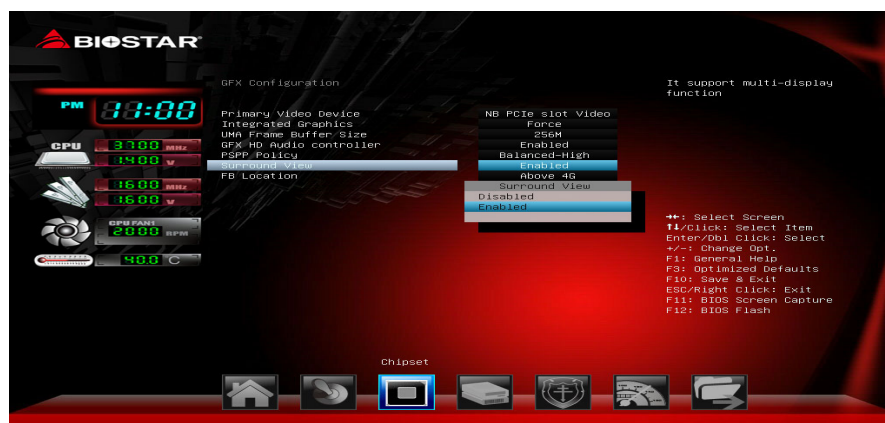

**Step 3:** Install Driver DVD Chipset Driver, and reboot the system. Activate AMD VISION Engine Control Center to make sure CrossFire has been enabled.

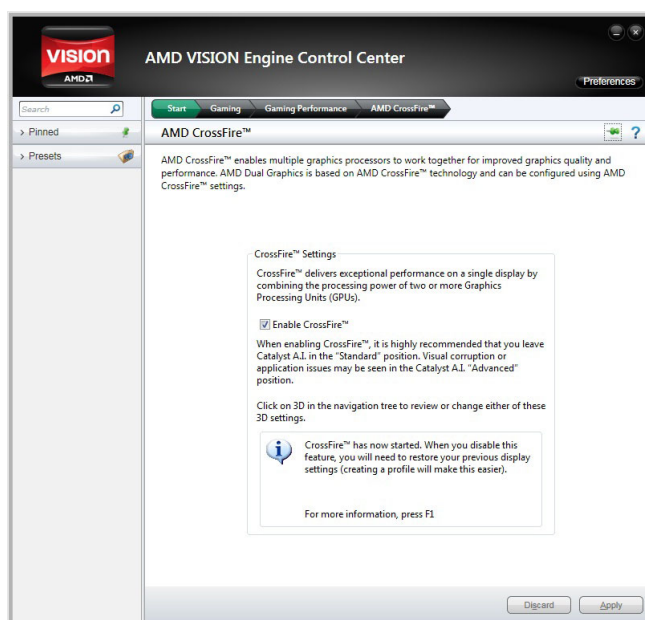

This Page Intentionally Left Blank

**APPENDIX: Specifications in Other Languages****Arabic**

المواصفات	
قاعدة وحدة المعالجة المركزية	المأخذ FM2+/FM2 لمعالج ايه إم دي AMD تسلسل A الحد الأقصى للطاقة الحرارية في تصميم المعالج ( TDP – thermal design power ): 100 واط. * يرجى الرجوع إلى الموقع <a href="http://www.biostar.com.tw">www.biostar.com.tw</a> لقائمة دعم المعالج CPU.
مجموعة الشرائح	AMD A88X FCH (Hi-Fi A88S3+) AMD A78 FCH (Hi-Fi A78S3+)
الذاكرة	تدعم قناة مزدوجة دي. دي. ار. 800 / 1066 / 1333 / 1600 / 1866 / 2133 / 2400(OC)/2600(OC) DDR3. ار. دي. دي. ار. DDR3 فتحات الذاكرة المزدوجة DIMM، تتحمل كحد أقصى 64 جيجابايت ذاكرة كل فتحة مزدوجة DIMM تتحمل دون 512 ECC ميجا بايت 1/2/4/8/16 جيجابايت دي. دي. ار. DDR3 * يرجى الرجوع إلى الموقع <a href="http://www.biostar.com.tw">www.biostar.com.tw</a> لقائمة دعم الذاكرة.
التخزين	ايه إم دي AMD A88X/A78 FCH تتحمّل رايد RAID 5 / 0 / 1 / 10 / AHCI (A88X FCH) تتحمّل رايد RAID 0 / 1 / 10 / AHCI (A78 FCH)
شبكة محلية LAN	ريالتيك رت ل REALTEK RTL 8111G 1000 / 100 / 10 ميجابايت / الثانية ، تحديد تلقائي ، النصف / القدرة القصوى المزدوجة
الترميز الصوتي	ALC892 7.1 قنوات عالية النقاء، Biostar Hi-Fi
ناقل متسلسل عام USB	يه إم دي AMD A88X/A78 FCH 8 منافذ x 2.0 USB ( 4 في المداخل والمخارج الخلفية و 4 من خلال الموزع الداخلي ) 4 منافذ x 3.0 USB ( 2 في المداخل والمخارج الخلفية و 2 من خلال الموزع الداخلي )
فتحات التوسع	2 x فتحة منفذ الملحقات الإضافية PCI 1 x فتحة منفذ الملحقات الإضافية PCIe 3.0 x16 (x16) 1 x فتحة منفذ الملحقات الإضافية PCIe 2.0 x16 (x4)
المداخل والمخارج الخلفية	1 x 2 PS/2 الفارة & لوحة المفاتيح للكمبيوتر فتحة توصيل عدد 1 x منظومة العرض المرئي VGA فتحة توصيل عدد 1 x واجهة مرئية رقمية HDMI فتحة توصيل عدد 1 x واجهة مرئية رقمية DVI فتحة لتوصيل عدد 1 x الشبكة المحلية LAN فتحة توصيل عدد 4 x ناقل متسلسل عام USB 2.0 فتحة توصيل عدد 2 x ناقل متسلسل عام USB 3.0 فتحة توصيل عدد 6 x جاك للصوت

## Hi-Fi A88S3+ / Hi-Fi A78S3+

المواصفات		
<b>+Hi-Fi A78S3</b>	<b>+Hi-Fi A88S3</b>	
وصلة 6 SATA x 6 جيجابايت / الثانية	وصلة 8 SATA x 6 جيجابايت / الثانية	
موزع x2 ناقل متصل عام USB 2.0	موزع x2 ناقل متصل عام USB 2.0	
موزع x1 ناقل متصل عام USB 3.0	موزع x1 ناقل متصل عام USB 3.0	
موصلة للطاقة 1 x 4 دبابيس	موصلة للطاقة 1 x 4 دبابيس	
وصلة للطاقة 1 x 24 دبابيس	وصلة للطاقة 1 x 24 دبابيس	
وصلة 1 x مروحة تبريد وحدة المعالجة المركزية	وصلة 1 x مروحة تبريد وحدة المعالجة المركزية	المدخل
وصلة x2 مراوح تبريد المنظومة	وصلة x2 مراوح تبريد المنظومة	والمخارج
موزع 1 x اللوحة الأمامية	موزع 1 x اللوحة الأمامية	الداخلية
موزع x1 الصوت الأمامي	موزع x1 الصوت الأمامي	
موزع x1 سيموس مباشر	موزع x1 سيموس مباشر	
موزع x1 فتحة للطابعة	موزع x1 فتحة للطابعة	
موزع 1 x مستهلك IR	موزع 1 x مستهلك IR	
موزع 1 x قنطرة تسلسلية	موزع 1 x قنطرة تسلسلية	
وصلة 1 x خارجية S/PDIF سوني فيليبس الواجهة الرقمية	وصلة 1 x خارجية S/PDIF سوني فيليبس الواجهة الرقمية	
عامل شكل مدد التكنولوجيا المتقدمة microATX ، 243.84 مم x 237.50 مم		عامل الشكل
ويندوز إكس بي / windows xp / ويندوز 7 / ويندوز 8		أنظمة التشغيل
بيوستار BIOSTAR تحتفظ بحق إضافة أو إزالة الدعم لأي نظام تشغيل مع أو بدون أنظار.		المدعومة

## French

Spécifications	
Support Unité Centrale	Interface de connexion FM2+/FM2 pour série A AMD processeur Enveloppe thermique Unité Centrale maximum : 100Watt * Veuillez vous reporter à <a href="http://www.biostar.com.tw">www.biostar.com.tw</a> pour la liste des supports modèles d'Unité Centrale.
Jeu de puces	AMD A88X FCH (Hi-Fi A88S3+) AMD A78 FCH (Hi-Fi A78S3+)
Mémoire	Supporte mémoire DDR3 double canal 800/ 1066/ 1333/ 1600/ 1866/ 2133/ 2400(OC)/ 2600(OC) Banc de mémoire 4 x DDR3 DIMM, Supporte max. jusqu'à une mémoire de 64 GB Chaque module DIMM supporte module DDR3 non-ECC 512MB/ 1/ 2/ 4/ 8/ 16 GB * Veuillez vous reporter à <a href="http://www.biostar.com.tw">www.biostar.com.tw</a> pour la liste des soutien de la mémoire.
Stockage	AMD A88X/A78 FCH Supporte système RAID 0,1,10, 5 & AHCI (A88X FCH) Supporte système RAID 0,1,10 & AHCI (A78 FCH)
Réseau local	Realtek RTL 8111G 10/ 100/ 1000 Mb/s auto négociation, capacité bidirectionnelle à l'alternat / bidirectionnelle simultanée
Codec audio	ALC892 Canaux 7.1, écoute audio de haute définition, Biostar Hi-Fi
USB	AMD A88X/A78 FCH Port 8x USB 2.0 (4 sur les I/O arrières et 4 en interne) Port 4x USB 3.0 (2 sur les I/O arrières et 2 en interne)
Connecteur d'extension	2x Fente PCI 1x PCIe 3.0 x16 Fente (x16) 1x PCIe 2.0 x16 Fente (x4)
I/O arrières	1x PS/2 Clavier & Souris 1x Port VGA 1x Port HDMI 1x Port DVI 1x port LAN 4x Port USB 2.0 2x Port USB 3.0 6x entrées audio

## Hi-Fi A88S3+ / Hi-Fi A78S3+

Spécifications																															
I/O en interne	<table border="0"> <thead> <tr> <th>Hi-Fi A88S3+:</th> <th>Hi-Fi A78S3+:</th> </tr> </thead> <tbody> <tr> <td>8x Connecteur SATA 6.0Gb/s</td> <td>6x Connecteur SATA 6.0Gb/s</td> </tr> <tr> <td>2x embases USB 2.0</td> <td>2x embases USB 2.0</td> </tr> <tr> <td>1x embases USB 3.0</td> <td>1x embases USB 3.0</td> </tr> <tr> <td>1x 4-Broche de carte</td> <td>1x 4-Broche de carte</td> </tr> <tr> <td>1x 24-Broche de carte</td> <td>1x 24-Broche de carte</td> </tr> <tr> <td>1x Connecteur ventilateur unité centrale</td> <td>1x Connecteur ventilateur unité centrale</td> </tr> <tr> <td>2x Connecteur ventilateur système</td> <td>2x Connecteur ventilateur système</td> </tr> <tr> <td>1x Fiche panneau avant</td> <td>1x Fiche panneau avant</td> </tr> <tr> <td>1x Fiche audio avant</td> <td>1x Fiche audio avant</td> </tr> <tr> <td>1x Fiche mémoire CMOS vide</td> <td>1x Fiche mémoire CMOS vide</td> </tr> <tr> <td>1x Embase port imprimante</td> <td>1x Embase port imprimante</td> </tr> <tr> <td>1x Fiche Registre d'état Consommateur</td> <td>1x Fiche Registre d'état Consommateur</td> </tr> <tr> <td>1x Embase port série</td> <td>1x Embase port série</td> </tr> <tr> <td>1x Connecteur sortie S/PDIF</td> <td>1x Connecteur sortie S/PDIF</td> </tr> </tbody> </table>	Hi-Fi A88S3+:	Hi-Fi A78S3+:	8x Connecteur SATA 6.0Gb/s	6x Connecteur SATA 6.0Gb/s	2x embases USB 2.0	2x embases USB 2.0	1x embases USB 3.0	1x embases USB 3.0	1x 4-Broche de carte	1x 4-Broche de carte	1x 24-Broche de carte	1x 24-Broche de carte	1x Connecteur ventilateur unité centrale	1x Connecteur ventilateur unité centrale	2x Connecteur ventilateur système	2x Connecteur ventilateur système	1x Fiche panneau avant	1x Fiche panneau avant	1x Fiche audio avant	1x Fiche audio avant	1x Fiche mémoire CMOS vide	1x Fiche mémoire CMOS vide	1x Embase port imprimante	1x Embase port imprimante	1x Fiche Registre d'état Consommateur	1x Fiche Registre d'état Consommateur	1x Embase port série	1x Embase port série	1x Connecteur sortie S/PDIF	1x Connecteur sortie S/PDIF
Hi-Fi A88S3+:	Hi-Fi A78S3+:																														
8x Connecteur SATA 6.0Gb/s	6x Connecteur SATA 6.0Gb/s																														
2x embases USB 2.0	2x embases USB 2.0																														
1x embases USB 3.0	1x embases USB 3.0																														
1x 4-Broche de carte	1x 4-Broche de carte																														
1x 24-Broche de carte	1x 24-Broche de carte																														
1x Connecteur ventilateur unité centrale	1x Connecteur ventilateur unité centrale																														
2x Connecteur ventilateur système	2x Connecteur ventilateur système																														
1x Fiche panneau avant	1x Fiche panneau avant																														
1x Fiche audio avant	1x Fiche audio avant																														
1x Fiche mémoire CMOS vide	1x Fiche mémoire CMOS vide																														
1x Embase port imprimante	1x Embase port imprimante																														
1x Fiche Registre d'état Consommateur	1x Fiche Registre d'état Consommateur																														
1x Embase port série	1x Embase port série																														
1x Connecteur sortie S/PDIF	1x Connecteur sortie S/PDIF																														
Facteur d'encombrement	Facteur d'encombrement microATX, 243.84 mm x 237.50 mm																														
Support SE	Windows XP / 7 / 8 Biostar se réserve le droit d'ajouter ou d'enlever le support pour toute SE avec ou sans préavis.																														

## German

Spezifikationen	
CPU-Unterstützung	<p>Anschluss-FM2+/FM2 für AMD A-Serie Prozessor</p> <p>Maximale CPU TDP (Thermal Design Power): 100 Watt</p> <p>* Bitte konsultieren Sie <a href="http://www.biostar.com.tw">www.biostar.com.tw</a> für CPU-Unterstützungsliste</p>
Chipset	<p>AMD A88X FCH (Hi-Fi A88S3+)</p> <p>AMD A78 FCH (Hi-Fi A78S3+)</p>
Festplattenspeicher	<p>Unterstützt zweikanaliges DDR3 800/ 1066/ 1333/ 1600/ 1866/ 2133/ 2400(OC)/ 2600(OC)</p> <p>4 x DDR3 DIMM-SpeicherSlot, Max. Unterstützung bis zu 64 GB-Speicher</p> <p>Jedes DIMM unterstützt nicht-ECC 512MB/ 1/ 2/ 4/ 8/ 16 GB DDR3-Module</p> <p>* Bitte konsultieren Sie <a href="http://www.biostar.com.tw">www.biostar.com.tw</a> für Speicherunterstützung Liste.</p>
Arbeitsspeicher	<p>AMD A88X/A78 FCH</p> <p>Unterstützt RAID 0,1,10, 5 &amp; AHCI (A88X FCH)</p> <p>Unterstützt RAID 0,1,10 &amp; AHCI (A78 FCH)</p>
LAN	<p>Realtek RTL 8111G</p> <p>10/ 100/ 1000 Mb Auto-Negotiation, Halb- / Voll-Duplex-fähig</p>
Audio-Codec	<p>ALC892</p> <p>7.1 Kanäle, HD-Audio, Biostar Hi-Fi</p>
USB	<p>AMD A88X/A78 FCH:</p> <p>8x USB 2.0-Port (4 hintere I/Os und 4 via interne Header)</p> <p>4x USB 3.0-Port (2 hintere I/Os und 2 via interne Header)</p>
Erweiterungsschlüsse	<p>2x PCI-Slot</p> <p>1x PCIe 3.0 x16-Slot (x16)</p> <p>1x PCIe 2.0 x16-Slot (x4)</p>
Hintere I/Os	<p>1x PS/2-Maus &amp; Keyboard</p> <p>1x VGA-Port</p> <p>1x HDMI -Port</p> <p>1x DVI-Port</p> <p>1x LAN-Port</p> <p>4x USB 2.0-Port</p> <p>2x USB 3.0-Port</p> <p>6x Audio Jack</p>



## Hi-Fi A88S3+ / Hi-Fi A78S3+

Spezifikationen		
	<b>Hi-Fi A88S3+:</b>	<b>Hi-Fi A78S3+:</b>
	8x SATA 6.0Gb/s-Verbindung	6x SATA 6.0Gb/s-Verbindung
	2x USB 2.0-Header	2x USB 2.0-Header
	1x USB 3.0-Header	1x USB 3.0-Header
	1x 4-Pin-Stromverbindung	1x 4-Pin-Stromverbindung
	1x 24-Pin-Stromverbindung	1x 24-Pin-Stromverbindung
	1x CPU-Ventilatorverbindung	1x CPU-Ventilatorverbindung
Interne I/Os	2x System-Ventilatorverbindung	2x System-Ventilatorverbindung
	1x Header für Frontpanel	1x Header für Frontpanel
	1x Header für Frontaudio	1x Header für Frontaudio
	1x Header für klares CMOS	1x Header für klares CMOS
	1x Header für Druckerport	1x Header für Druckerport
	1x Consumer IR-Header	1x Consumer IR-Header
	1x Serieller Port-Header	1x Serieller Port-Header
	1x S/PDI-Auswurfsverbindung	1x S/PDI-Auswurfsverbindung
Formfaktor	microATX Formfaktor, 243.84 mm x 237.50 mm	
OS-Unterstützung	Windows XP / 7 / 8	
	Biostar reserves the right to add or remove support for any OS with or without notice.	

## Italian

Specificazioni	
Supporto processore	Slot FM2+/FM2 per processore AMD serie-A Alimentazione di Proiezione Termico (TDP – Thermal Design Power): 100Watt * Si prega di consultare <a href="http://www.biostar.com.tw">www.biostar.com.tw</a> per la lista di supporto del processore.
Tipo scheda	AMD A88X FCH (Hi-Fi A88S3+) AMD A78 FCH (Hi-Fi A78S3+)
Memoria	Supporta DDR3 800/ 1066/ 1333/ 1600/ 1866/ 2133/ 2400(OC)/ 2600(OC) Doppio Canale 4 x DDR3 DIMM Slot di Memoria Supporta fino a 64 GB Memoria Ogni DIMM supporta non-ECC 512MB/ 1/ 2/ 4/ 8/ 16 GB DDR3 moduli * Si prega di consultare <a href="http://www.biostar.com.tw">www.biostar.com.tw</a> per la lista di supporto del memoria.
Memorizzazione	AMD A88X/A78 FCH Supporta RAID 0,1,10, 5 & AHCI (A88X FCH) Supporta RAID 0,1,10 & AHCI (A78 FCH)
Catena	Realtek RTL 8111G 10/ 100/ 1000 Mb auto negoziazione, capacita di duplex Meta / Completo
Codec Audio	ALC892 Canali Audio di Alta Definizione 7.1, Biostar Hi-Fi
USB	Piattaforma AMD A88X/A78 FCH: Slot 8x USB 2.0 (4 nei ingressi/ uscite posteriore e 4 da distributori interni) Slot 4x USB 3.0 (2 nei ingressi/ uscite posteriore e 2 da distributori interni)
Slot di espansione	Slot 2x PCI Slot 1x PCIe 3.0 x16 (x16) Slot 1x PCIe 2.0 x16 (x4)
Ingressi/ Uscite Posteriore	Tastiera & Mouse 1x PS/2 Slot 1x VGA Slot 1x HDMI Slot 1x DVI Slot 1x LAN Slot 4x USB 2.0 Slot 2x USB 3.0 Jack audio 6x

## Hi-Fi A88S3+ / Hi-Fi A78S3+

Specificazioni		
Ingressi/ Uscite Interni	<b>Hi-Fi A88S3+:</b>	<b>Hi-Fi A78S3+:</b>
	Connettore 8x SATA 6.0Gb/s	Connettore 6x SATA 6.0Gb/s
	Distributore 2x USB 2.0	Distributore 2x USB 2.0
	Distributore 1x USB 3.0	Distributore 1x USB 3.0
	Connettore con 4 pin x1	Connettore con 4 pin x1
	Connettore con 24 pin x1	Connettore con 24 pin x1
	Connettore Ventilatore processore x1	Connettore Ventilatore processore x1
	Connettore Ventilatore Sistema x2	Connettore Ventilatore Sistema x2
	Distributore Pannello Frontale x1	Distributore Pannello Frontale x1
	Distributore Audio Frontale x1	Distributore Audio Frontale x1
	Distributore CMOS Diretto x1	Distributore CMOS Diretto x1
	Distributore Slot Stampante x1	Distributore Slot Stampante x1
	Distributore Consumabile IR x1	Distributore Consumabile IR x1
Distributore Slot Serie x1	Distributore Slot Serie x1	
Connettore esterno S/PDIF x1	Connettore esterno S/PDIF x1	
Fattore di Forma	Fattore di Forma microATX, 243.84 mm x 237.50 mm	
Supporto SO	Windows XP / 7 / 8 Biostar si riserva il diritto di aggiungere o ritirare il supporto per qualsiasi SO con o senza preavviso.	

## Japanese

仕様	
CPU サポート	AMD A-シリーズ プロセッサの Socket FM2+/FM2 最大 CPU TDP (Thermal Design Power 最大放熱量) :100 W *CPU サポート リストについては、 <a href="http://www.biostar.com.tw">www.biostar.com.tw</a> を参照してください。
チップセット	AMD A88X FCH (Hi-Fi A88S3+) AMD A78 FCH (Hi-Fi A78S3+)
メモリ	デュアルチャンネル DDR3 800/ 1066/ 1333/ 1600/ 1866/ 2133/ 2400(OC)/ 2600(OC) をサポート 4 x DDR3 DIMM メモリ スロット、最大 64 GB メモリまでサポート 各 DIMM は、非-ECC 512MB/ 1/ 2/ 4/ 8/ 16 GB DDR3 モジュールをサポートしています *サポートされているメモリのリストについては、 <a href="http://www.biostar.com.tw">www.biostar.com.tw</a> を参照してください。
保存スペース	AMD A88X/A78 FCH RAID 0,1,10, 5 & AHCI のサポート (A88X FCH) RAID 0,1,10 & AHCI のサポート (A78 FCH)
LAN	Realtek RTL 8111G 10/ 100/ 1000 Mb/s オートネゴシエーション、半/全 二重通信
オーディオ コーデック	ALC892 7.1 チャンネル, ハイ デフィニション オーディオ, Biostar Hi-Fi
USB	AMD A88X/A78 FCH: 8x USB 2.0 ポート (後部 I/O に4つ 及び 内蔵ヘッダー経由に4つ) 4x USB 3.0 ポート (後部 I/O に2つ 及び 内蔵ヘッダー経由に2つ)
拡張スロット	2x PCI スロット 1x PCIe 3.0 x16 スロット(x16) 1x PCIe 2.0 x16 スロット(x4)
後部 I/O	1x PS/2 キーボード & マウス 1x VGA ポート 1x HDMI ポート 1x DVI ポート 1x LAN ポート 4x USB 2.0 ポート 2x USB 3.0 ポート 6x オーディオ ジャック

## Hi-Fi A88S3+/Hi-Fi A78S3+

仕様		
内蔵 I/O	<b>Hi-Fi A88S3+:</b> 8x SATA 6.0Gb/s コネクタ 2x USB 2.0 ヘッダー 1x USB 3.0 ヘッダー 1x 4-Pin パワー コネクタ 1x 24-Pin パワー コネクタ 1x CPU ファン コネクタ 2x システム ファン コネクタ 1x フロント パネル ヘッダー 1x フロント オーディオ ヘッダー 1x クリア CMOS ヘッダー 1x プリンター ポート ヘッダー 1x コンシューマー IR ヘッダー 1x シリアル ポート ヘッダー 1x S/PDIF アウト コネクタ	<b>Hi-Fi A78S3+:</b> 6x SATA 6.0Gb/s コネクタ 2x USB 2.0 ヘッダー 1x USB 3.0 ヘッダー 1x 4-Pin パワー コネクタ 1x 24-Pin パワー コネクタ 1x CPU ファン コネクタ 2x システム ファン コネクタ 1x フロント パネル ヘッダー 1x フロント オーディオ ヘッダー 1x クリア CMOS ヘッダー 1x プリンター ポート ヘッダー 1x コンシューマー IR ヘッダー 1x シリアル ポート ヘッダー 1x S/PDIF アウト コネクタ
	フォーム ファクタ	microATX フォーム ファクタ、243.84 mm x 237.50 mm
	サポート OS	Windows XP / 7 / 8 Biostar には、通知なしでサポート OS を変更する権限があります。

## Polish

Specyfikacje techniczne	
Obsługa procesora	Gniazdo procesora (Socket) FM2+/FM2 dla procesorów AMD seria-A Moc Wydzielanego Ciepła (TDP - Thermal Design Power): 100Watt * Proszę sprawdzić listę obsługiwanych procesorów na stronie internetowej <a href="http://www.biostar.com.tw">www.biostar.com.tw</a>
Rodzaj płyty	AMD A88X FCH (Hi-Fi A88S3+) AMD A78 FCH (Hi-Fi A78S3+)
Pamięć	Obsługa pamięci DDR3 800/ 1066/ 1333/ 1600/ 1866/ 2133/ 2400(OC)/ 2600(OC) Dwukanałowa 4 x DDR3 DIMM Pamięć Gniazda procesora (Slot), Maksymalna wielkość pamięci 64 GB Każdy DIMM obsługuje jeden moduł non-ECC 512MB/ 1/ 2/ 4/ 8/ 16 GB DDR3 * Proszę sprawdzić listę obsługiwanych pamięć na stronie internetowej <a href="http://www.biostar.com.tw">www.biostar.com.tw</a>
Przechowywanie	AMD A88X/A78 FCH Obsługa RAID 0,1,10, 5 & AHCI (A88X FCH) Obsługa RAID 0,1,10 & AHCI (A78 FCH)
LAN	Układ RTL 8111G 10/ 100/ 1000 Mb auto negocjacja, pojemność duplex Połowe / Pełny
Codec Audio	ALC892 Kanały Audio wysokiej Definicji 7.1, Biostar Hi-Fi
USB	Płyta AMD A88X/A78 FCH: 8 x złącza USB 2.0 (4 przez tylne porty wejścia/ wyjścia oraz 4 przez wewnętrzne porty) 4 x złącza USB 3.0 (2 przez tylne porty wejścia/ wyjścia oraz 2 przez wewnętrzne porty)
Złącza rozszerzeń	złącza 2x PCI (Slot) złącza 1x PCIe 3.0 x16 (Slot) (x16) złącza 1x PCIe 2.0 x16 (Slot) (x4)
Tylne porty wejścia/ wyjścia	Klawiatura & Myszka 1x PS/2 Port 1x VGA Port 1x HDMI Port 1x DVI Port 1x LAN Porty 4x USB 2.0 Porty 2x USB 3.0 Porty audio 6x

## Hi-Fi A88S3+ / Hi-Fi A78S3+

Specyfikacje techniczne		
Wewnętrzne porty wejścia/ wyjścia	<b>Hi-Fi A88S3+:</b>	<b>Hi-Fi A78S3+:</b>
	Złącza 8x SATA 6.0Gb/s	Złącza 6x SATA 6.0Gb/s
	Złącza 2x USB 2.0	Złącza 2x USB 2.0
	Złącza 1x USB 3.0	Złącza 1x USB 3.0
	Złącza 4 pionowe x 1	Złącza 4 pionowe x 1
	Złącza 24 pionowe x 1	Złącza 24 pionowe x 1
	Złącze wentylatora CPU x 1	Złącze wentylatora CPU x 1
	Złącze wentylatora obudowy x 2	Złącze wentylatora obudowy x 2
	Złącze przedniego panelu x1	Złącze przedniego panelu x1
	Złącze audio przedniego panelu x1	Złącze audio przedniego panelu x1
	Złącze bezpośrednie CMOS x1	Złącze bezpośrednie CMOS x1
	Złącze port drukarki x1	Złącze port drukarki x1
	Złącze konsument IR x1	Złącze konsument IR x1
	Port szeregowy x1	Port szeregowy x1
Port zewnętrzny S/PDIF x1	Port zewnętrzny S/PDIF x1	
Obudowa	Obudowa microATX, 243.84 mm x 237.50 mm	
Obsługa OS	Windows XP / 7 / 8 Biostar zastrzega sobie prawo do dodania lub wycofania obsługi dla OS, z wypowiedzeniem lub bez wypowiedzenia.	

## Portuguese

Especificações	
Suporte Processador	<p>Porta FM2+/FM2 para processador AMD série-A</p> <p>Alimentação de Design Térmico (TDP – Thermal Design Power): 100Watt</p> <p>* Por favor consulte <a href="http://www.biostar.com.tw">www.biostar.com.tw</a> para obter uma lista de suporte do processador.</p>
Tipo Placa Mãe	<p>AMD A88X FCH (Hi-Fi A88S3+)</p> <p>AMD A78 FCH (Hi-Fi A78S3+)</p>
Memória	<p>Suporta DDR3 800/ 1066/ 1333/ 1600/ 1866/ 2133/ 2400(OC)/ 2600(OC) Canal Duplo</p> <p>4 x DDR3 DIMM Slot de memória Suporta até 64 GB Memória</p> <p>Cada DIMM suporta non-ECC 512MB/ 1/ 2/ 4/ 8/ 16 GB DDR3 módulo</p> <p>* Por favor consulte <a href="http://www.biostar.com.tw">www.biostar.com.tw</a> para obter uma lista de suporte do memória.</p>
Armazenamento	<p>AMD A88X/A78 FCH</p> <p>Suporta RAID 0,1,10, 5 &amp; AHCI (A88X FCH)</p> <p>Suporta RAID 0,1,10 &amp; AHCI (A78 FCH)</p>
LAN	<p>Realtek RTL 8111G</p> <p>10/ 100/ 1000 Mb auto negociação, capacidade duplex Metade / Cheio</p>
Codec de Audio	<p>ALC892</p> <p>Canais de Áudio de Alta Definição 7.1, Biostar Hi-Fi</p>
USB	<p>Plataforma AMD A88X/A78 FCH:</p> <p>Porta 8x USB 2.0 (4 nas entradas/saídas traseiras e 4 pelos Dispositivos internos)</p> <p>Porta 4x USB 3.0 (2 nas entradas/saídas traseiras e 2 pelos Dispositivos internos)</p>
Slots de expansão	<p>Porta 2x PCI</p> <p>Porta 1x PCIe 3.0 x16 (x16)</p> <p>Porta 1x PCIe 2.0 x16 (x4)</p>
Entradas/Saídas no painéis traseiro	<p>Teclado &amp; Mouse 1x PS/2</p> <p>Porta 1x VGA</p> <p>Porta 1x HDMI</p> <p>Porta 1x DVI</p> <p>Porta 1x LAN</p> <p>Porta 4x USB 2.0</p> <p>Porta 2x USB 3.0</p> <p>Soquete audio 6x</p>



**Hi-Fi A88S3+ / Hi-Fi A78S3+**

<b>Especificações</b>		
Conectores na placa	<b>Hi-Fi A88S3+:</b>	<b>Hi-Fi A78S3+:</b>
	Conector 8x SATA 6.0Gb/s	Conector 6x SATA 6.0Gb/s
	Dispositivo 2x USB 2.0	Dispositivo 2x USB 2.0
	Dispositivo 1x USB 3.0	Dispositivo 1x USB 3.0
	Conector de 4 pinos x1	Conector de 4 pinos x1
	Conector de 24 pinos x1	Conector de 24 pinos x1
	Conector de Ventoinha processador x1	Conector de Ventoinha processador x1
	Conector de Ventoinha Sistema x2	Conector de Ventoinha Sistema x2
	Dispositivo Painel Frontal x1	Dispositivo Painel Frontal x1
	Dispositivo de Audio Frontal x1	Dispositivo de Audio Frontal x1
	Dispositivo CMOS Direct x1	Dispositivo CMOS Direct x1
	Dispositivo Consumível IR x1	Dispositivo Consumível IR x1
	Dispositivo Porta Impressora x1	Dispositivo Porta Impressora x1
	Dispositivo Porta Série x1	Dispositivo Porta Série x1
Conector Externo S/PDIF x1	Conector Externo S/PDIF x1	
Fator de Fôrma	Fator de Fôrma microATX, 243.84 mm x 237.50 mm	
Suporte OS	Windows XP / 7 / 8 Biostar reserva seu direito de adicionar ou retirar o suporte para qualquer OS com ou sem notificação.	

## Russian

Спецификации	
Поддержка центрального процессора	Сокет FM2+/FM2 для процессоров AMD серии A Максимальный термopakет центрального процессора (TDP): 100 ватт * Перечень поддержки центрального процессора смотрите на <a href="http://www.biostar.com.tw">www.biostar.com.tw</a> .
Набор микросхем	AMD A88X FCH (Hi-Fi A88S3+) AMD A78 FCH (Hi-Fi A78S3+)
Память	Поддерживает двухканальный DDR3 800/ 1066/ 1333/ 1600/ 1866/ 2133/ 2400(OC)/ 2600(OC) 4 гнезда платы памяти DDR3 DIMM, максимальная память до 64 Гб Каждый модуль DIMM поддерживает модуль не-ECC 512 Мб/ 1/ 2/ 4/ 8/ 16 Гб DDR3 * Перечень поддержки памяти смотрите на <a href="http://www.biostar.com.tw">www.biostar.com.tw</a> .
Накопитель	AMD A88X/A78 FCH Поддерживает RAID 0,1,10, 5 & AHCI (A88X FCH) Поддерживает RAID 0,1,10 & AHCI (A78 FCH)
Локальная сеть	Realtek RTL 8111G Автосогласование 10/ 100/ 1000 Мб/с, работает в полно/полудуплексном режиме
Аудиокодек	ALC892 Каналы 7.1, высококачественное аудио, Biostar Hi-Fi
USB	AMD A88X/A78 FCH: 8 портов USB 2.0 (4 сзади ввода-вывода и 4 через внутренние контакты) 4 портов USB 3.0 (2 сзади ввода-вывода и 2 через внутренние контакты)
Гнезда расшир.	2x гнезда PCI 1x PCIe 3.0 x16 гнездо (x16) 1x PCIe 2.0 x16 гнездо (x4)
Задняя плата ввода-вывода	1 мышь & клавиатура PS/2 1 порт VGA 1 порт HDMI 1 порт DVI 1 порт локальной сети 4 порта USB 2.0 2 порта USB 3.0 6 гнезд для подключения наушников

## Hi-Fi A88S3+ / Hi-Fi A78S3+

Спецификации		
Внутр. Плата ввода-вывода	<b>Hi-Fi A88S3+:</b>	<b>Hi-Fi A78S3+:</b>
	Соединитель 8x SATA 6 Гб/с	Соединитель 6x SATA 6 Гб/с
	2 контакта USB 2.0	2 контакта USB 2.0
	1 контакта USB 3.0	1 контакта USB 3.0
	1 4-выводный разъем питания	1 4-выводный разъем питания
	1 24-выводный разъем питания	1 24-выводный разъем питания
	1 разъем вентилятора ЦП	1 разъем вентилятора ЦП
	2 разъема вентилятора системы	2 разъема вентилятора системы
	1 контакт передней панели	1 контакт передней панели
	1 контакт передней аудиопанели	1 контакт передней аудиопанели
	1 контакт микросхемы Clear CMOS	1 контакт микросхемы Clear CMOS
	1 контакт порта принтера	1 контакт порта принтера
	1 инфракрасный пользовательский контакт	1 инфракрасный пользовательский контакт
	1 контакт последовательного порта	1 контакт последовательного порта
	1 соединитель S/PDIF-Out	1 соединитель S/PDIF-Out
Конструктив	Форм-фактор microATX, 243.84 мм x 237.50 мм	
Поддержка ОС	Windows XP / 7 / 8 Biostar оставляет за собой право добавлять или удалять поддержку любой ОС, с уведомлением или без.	

## Spanish

Especificaciones	
Compatibilidad con el procesador	Ranura FM2+/FM2 para procesador AMD serie - A Alimentación de Proyección Térmica (TDP – Thermal Design Power): 100Watt *Por favor consultar con <a href="http://www.biostar.com.tw">www.biostar.com.tw</a> para la lista de compatibilidad con el procesador.
Tipo de Placa	AMD A88X FCH (Hi-Fi A88S3+) AMD A78 FCH (Hi-Fi A78S3+)
Memoria	Soporta DDR3 800/ 1066/ 1333/ 1600/ 1866/ 2133/ 2400(OC)/ 2600(OC) Doble Canal 4x DDR3 DIMM Ranura de memoria Soporta hasta 64 GB Memoria Cada DIMM soporta un modulo non-ECC 512MB/ 1/ 2/ 4/ 8/ 16 GB DDR3 *Por favor consultar con <a href="http://www.biostar.com.tw">www.biostar.com.tw</a> para la lista de compatibilidad con el memoria.
Almacenamiento de información	AMD A88X/A78 FCH Soporta RAID 0,1,10, 5 & AHCI (A88X FCH) Soporta RAID 0,1,10 & AHCI (A78 FCH)
LAN	Realtek RTL 8111G 10/ 100/ 1000 Mb/s auto negociación, capacidad dúplex Mitad/Completo
Códec Audio	ALC892 Canales Audio de Alta Definición 7.1, Biostar Hi-Fi
USB	Plataforma AMD A88X/A78 FCH: Ranura 8x USB 2.0 (4 en las entradas/salidas posteriores y 4 por los distribuidores internos) Ranura 4x USB 3.0 (2 en las entradas/salidas posteriores y 2 por los distribuidores internos)
Ranuras de Extinción	Ranura 2x PCI Ranura 1x PCIe 3.0 x16 (x16) Ranura 1x PCIe 2.0 x16 (x4)
Panel trasero de E/S	Teclado & Ratón 1x PS/2 Ranura 1x VGA Ranura 1x HDMI Ranura 1x DVI Ranura 1x LAN Ranura 4x USB 2.0 Ranura 2x USB 3.0 Socket audio 6x

## Hi-Fi A88S3+ / Hi-Fi A78S3+

Especificaciones		
Conectores en placa	<b>Hi-Fi A88S3+:</b> Conector 8x SATA 6Gb/s Distribuidor 2x USB 2.0 Distribuidor 1x USB 3.0 Conector con 4 patillas x1 Conector con 24 patillas x1 Conector Ventilador procesador x1 Conector Ventilador Sistema x2 Distribuidor Panel Frontal x1 Distribuidor Audio Frontal x1 Distribuidor CMOS Directo x1 Distribuidor Ranura Impresora x1 Distribuidor Consumible IR x1 Distribuidor Ranura Serie x1 Conector Externo S/PDIF x1	<b>Hi-Fi A78S3+:</b> Conector 6x SATA 6Gb/s Distribuidor 2x USB 2.0 Distribuidor 1x USB 3.0 Conector con 4 patillas x1 Conector con 24 patillas x1 Conector Ventilador procesador x1 Conector Ventilador Sistema x2 Distribuidor Panel Frontal x1 Distribuidor Audio Frontal x1 Distribuidor CMOS Directo x1 Distribuidor Ranura Impresora x1 Distribuidor Consumible IR x1 Distribuidor Ranura Serie x1 Conector Externo S/PDIF x1
	Factor de Forma	Factor de Forma microATX, 243.84 mm x 237.50 mm
	Soporte OS	Windows XP / 7 / 8 Biostar reserva su derecho de añadir o retirar el soporte para cada OS con o sin notificación.

2013/08/27